



- 1.1 Lawn, perennials, shrubs and small trees.
- 1.2 System substrate 'Roof Garden', depth: ≥ 200 mm.
For total substrate depth exceeding 350-400 mm:
in project specific combination with mineral sub-substrate 'Zincolit Plus'
- 1.3 Filter Sheet TG
- 1.4 Drainage element Stabilodrain® SD 30
- 1.5 Protection Mat ISM 50
- 1.6 Roof construction with root-resistant waterproofing

2.1 Sitting wall in concrete foundation

- 3.1 Concrete paving slab
- 3.2 Bedding layer: stone chippings, 30 - 50 mm
- 3.3 Drainage element Stabilodrain® SD 30 infill with stone chippings, see 3.2

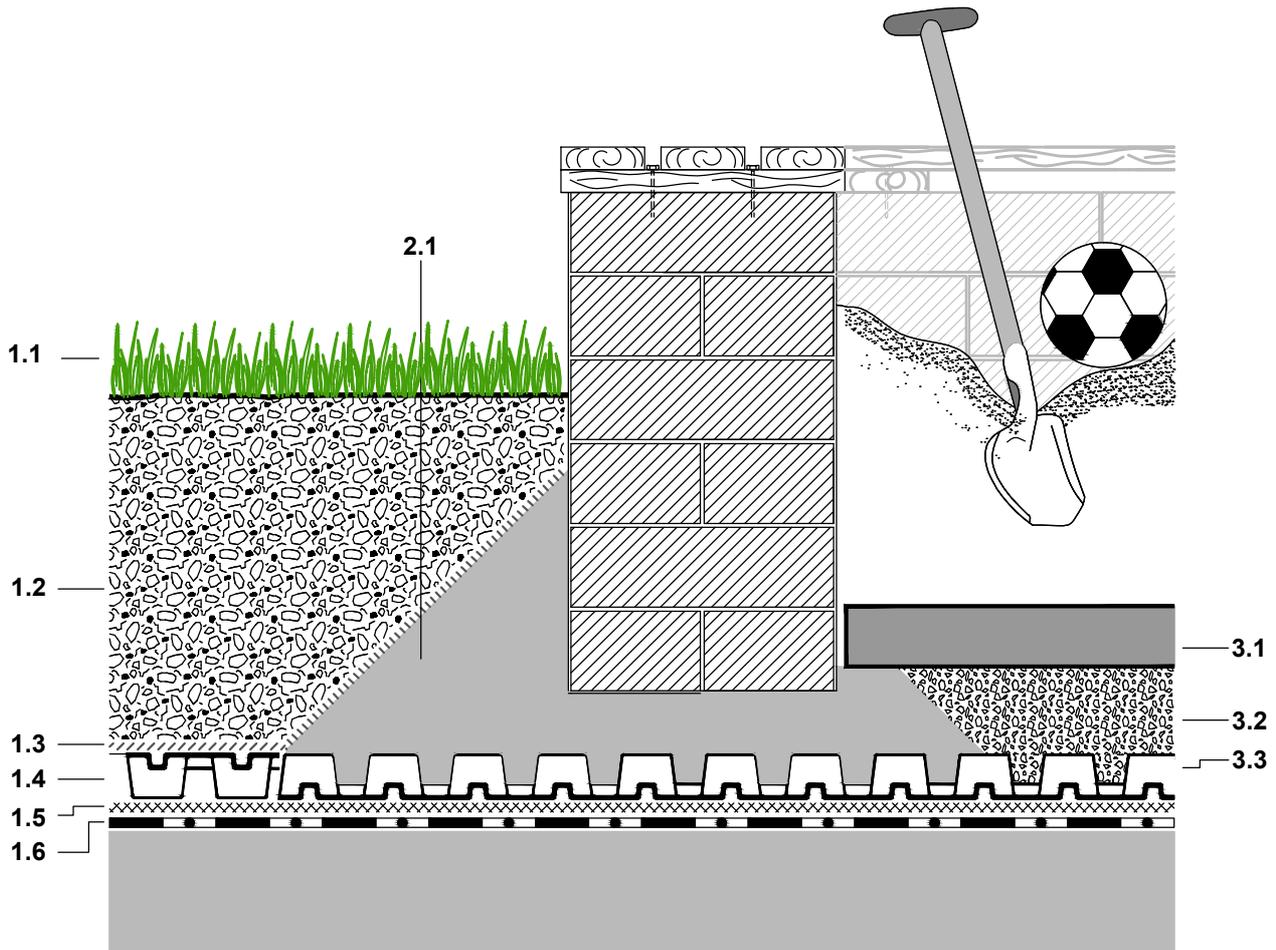

PLEASE NOTE:
THIS DETAILED SOLUTION MAINLY REFERS TO THE GREEN ROOF SYSTEM. THE ROOF CONSTRUCTION IS ONLY SCHEMATIC.
THE DIMENSIONS SHOWN ARE REQUIRED DIMENSIONS FOR THE ZINCO GREEN ROOF SYSTEM.
IN SOME CASES, LOCAL CODES AND STANDARDS MAY REQUIRE GREATER DIMENSIONS FOR A PARTICULAR APPLICATION.
THE DESIGNER / PLANNER MUST VERIFY COMPLIANCE WITH LOCAL CODES AND STANDARDS.



	Issued on: 10.09.2014	System: 'Landscape Underground Garage' with Stabilodrain® SD 30	Drawing title: Play area	Drawn by: pbi
	Modified: 14.11.2014 09:34		Job title: -STANDARD ARCHITECTURAL DETAIL-	Scale: 1:5
	File: CAD_en_LUG_SD30_Fr_Det03.dwg		Subject to technical alterations and printing errors; Authorized by ZinCo GmbH, 72622 Nuertingen, Germany Tel. ++49/7022/6003-100 Fax ++49/7022/6003-100, e-mail: info@zinco-greenroof.com, www.zinco-greenroof.com	