


"Walk- and Driveway" with Stabilodrain® SD 30 on Inverted Roof

Detail:
System Build-Up

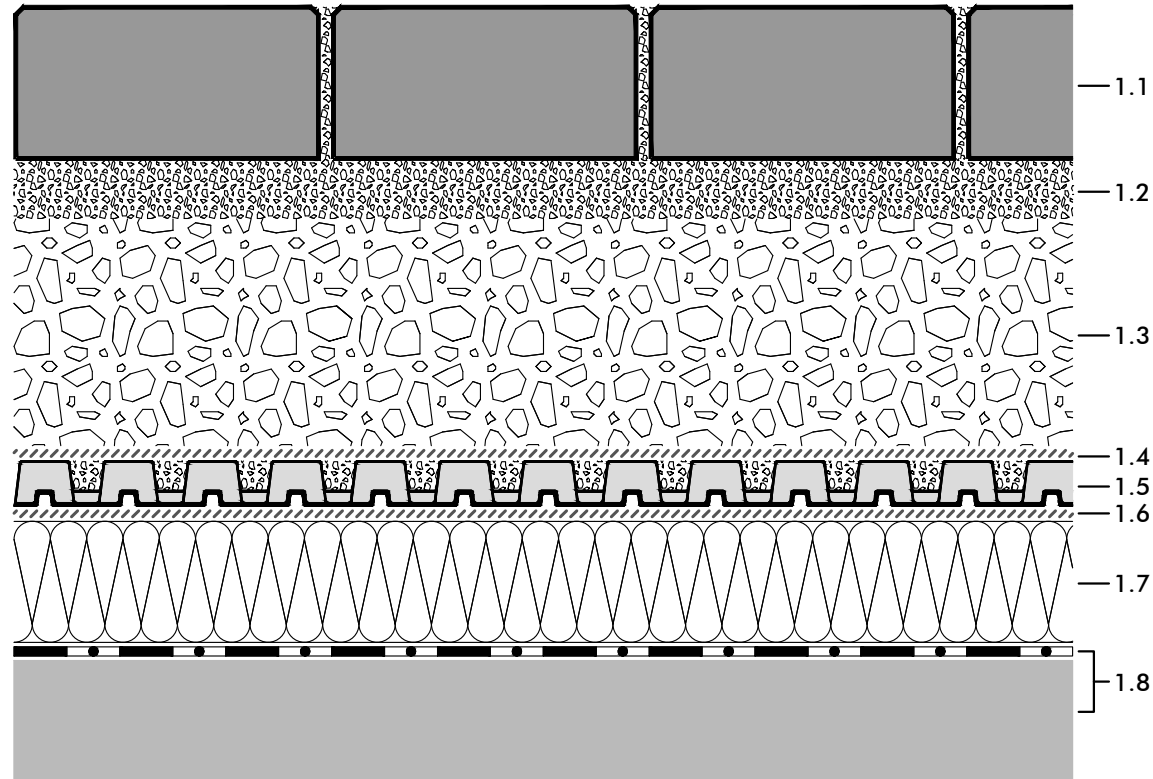

System build-up

- 1.1 Paving, e.g. concrete pavers
Depth: ≥ 100 mm for cars up to 3 t
 ≥ 120 mm for lorries up to 16 t
 ≥ 140 mm for lorries exceeding 16 t
- 1.2 Bedding layer, stone chippings, poor in lime, 30-50 mm
- 1.3 Compacted base layer, e.g. gravel, poor in lime
Depth: ≥ 150 mm for cars up to 3 t
 ≥ 200 mm for lorries up to 16 t
 ≥ 250 mm for lorries exceeding 16 t
- 1.4 Filter Sheet PV
- 1.5 Stabilodrain® SD 30, filled with stone chippings (see 1.2)
- 1.6 Filter Sheet PV
- 1.7 XPS insulation
- 1.8 Roof construction with suitable waterproofing

Note:

The detailed solution shown here refers mainly to the ZinCo System Build-up. The roof construction itself as well as any other constructions are shown schematically and must be planned according to the relevant standards and guidelines.

Project:

-

Version: 29.11.2018 PBi/ EVo
Reviewed: -
Scale: none
Size: A 4

SysFahr_G+F_SD30_Ukd.dwg

Authorized by ZinCo GmbH, Lise-Meitner-Str. 2,
72622 Nuertingen/ Germany; Tel: ++49/7022-6003-0
info@zinco-greenroof.com; www.zinco-greenroof.com

Subject to technical alterations and printing errors.

