


- 1.1 Lawn, perennials, shrubs and small trees.
- 1.2 System substrate 'Roof Garden', depth: ≥ 200 mm.
For total substrate depth exceeding 350-400 mm:
in project specific combination with mineral sub-substrate 'Zincolit Plus'
- 1.3 Filter Sheet TG
- 1.4 Drainage element Stabilodrain® SD 30
- 1.5 Protection Mat ISM 50
- 1.6 Roof construction with root-resistant waterproofing

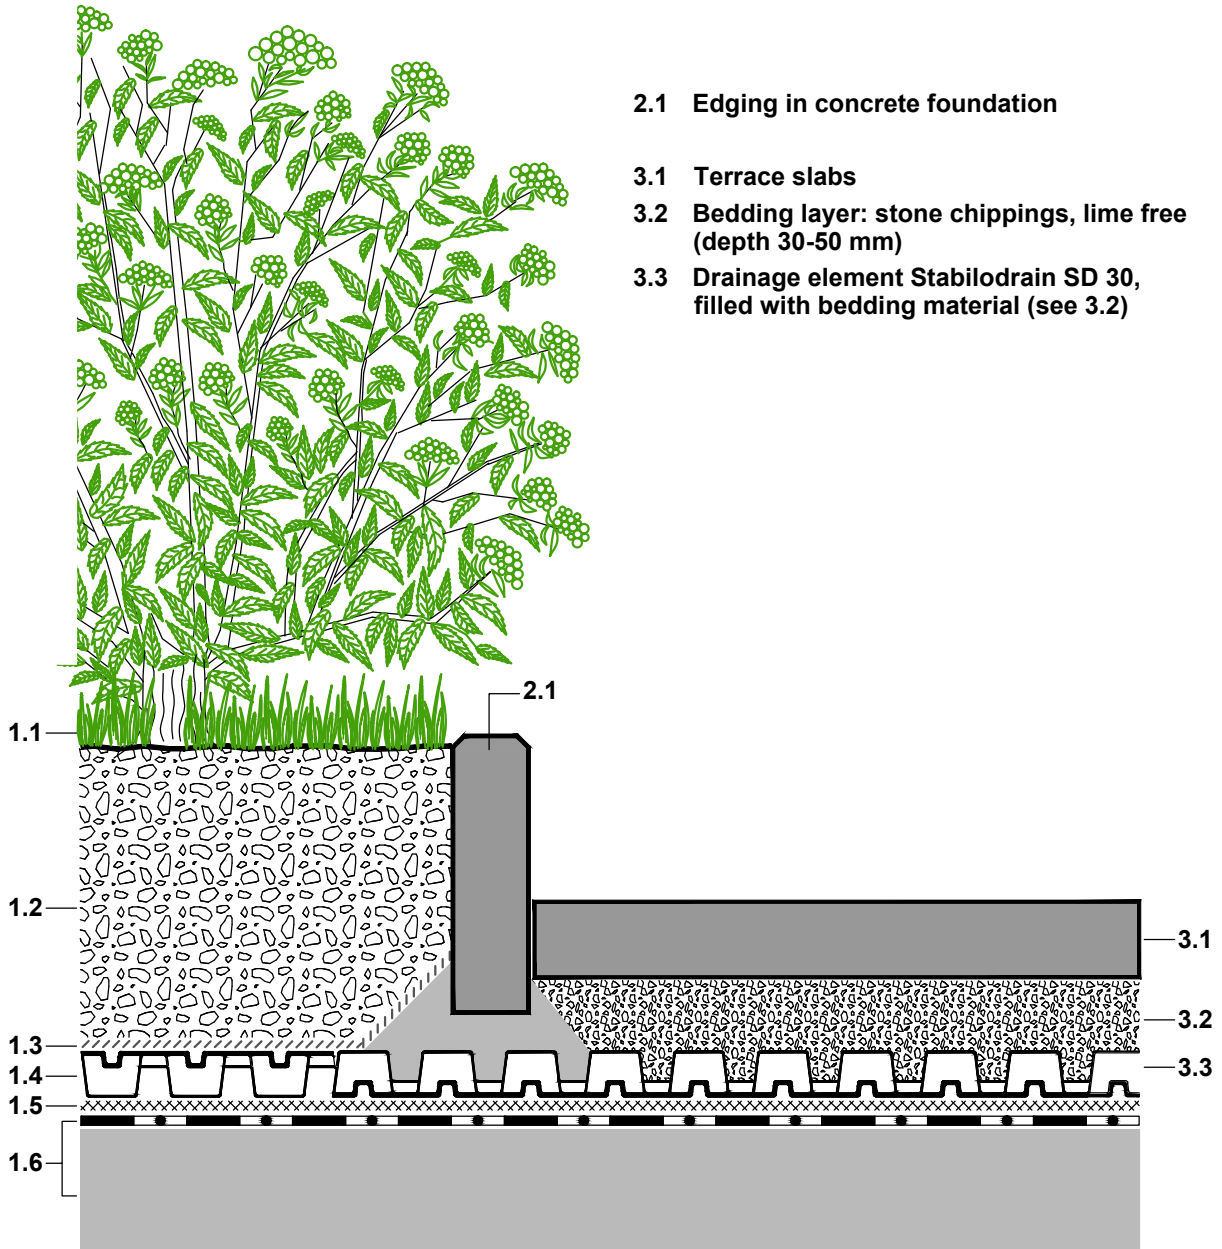


2.1 Edging in concrete foundation


3.1 Terrace slabs

3.2 Bedding layer: stone chippings, lime free (depth 30-50 mm)

3.3 Drainage element Stabilodrain SD 30, filled with bedding material (see 3.2)

PLEASE NOTE:
THIS DETAILED SOLUTION MAINLY REFERS TO THE GREEN ROOF SYSTEM. THE ROOF CONSTRUCTION IS ONLY SCHEMATIC.
THE DIMENSIONS SHOWN ARE REQUIRED DIMENSIONS FOR THE ZINCO GREEN ROOF SYSTEM.
IN SOME CASES, LOCAL CODES AND STANDARDS MAY REQUIRE GREATER DIMENSIONS FOR A PARTICULAR APPLICATION.
THE DESIGNER / PLANER MUST VERIFY COMPLIANCE WITH LOCAL CODES AND STANDARDS.



	Issued on: 10.09.2014	System: 'Landscaped Underground Garage' with Stabilodrain® SD 30	Drawing title: Edging between vegetation and hard landscape (low build up)	Drawn by: pbi
	Modified: 14.11.2014 09:41		Job title: -STANDARD ARCHITECTURAL DETAIL-	Scale: 1:5
	File: CAD_en_LUG_SD30_Fr_Edg01.dwg		Subject to technical alterations and printing errors; Authorized by ZinCo GmbH, 72622 Nuertingen, Germany Tel. ++49/7022/6003-100 Fax ++49/7022/6003-100, e-mail: info@zinco-greenroof.com, www.zinco-greenroof.com	