




- 1.1 Lawn, perennials, shrubs and small trees.
  - 1.2 System substrate 'Roof Garden', depth:  $\geq 200$  mm.  
For total substrate depth exceeding 350-400 mm:  
in project specific combination with mineral sub-substrate 'Zincolit Plus'
  - 1.3 Filter Sheet TG
  - 1.4 Drainage element Stabilodrain® SD 30
  - 1.5 Protection Mat ISM 50
  - 1.6 Roof construction with root-resistant waterproofing
- 
- 2.1 Clamping and Protection Profile AP 150
  - 2.2 Concrete L-curb
  - 2.3 Strip, gravel

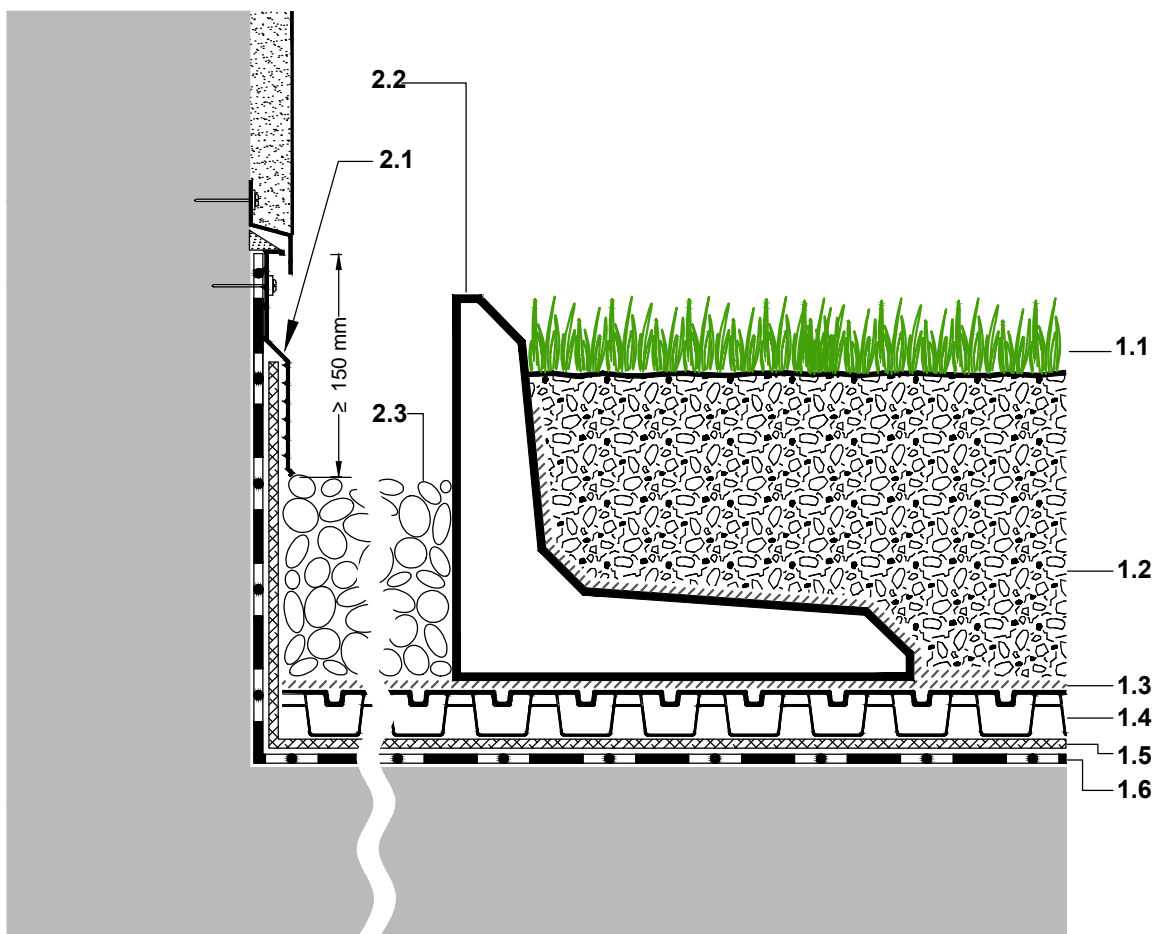

**PLEASE NOTE:**

THIS DETAILED SOLUTION MAINLY REFERS TO THE GREEN ROOF SYSTEM. THE ROOF CONSTRUCTION IS ONLY SCHEMATIC. THE DIMENSIONS SHOWN ARE REQUIRED DIMENSIONS FOR THE ZINCO GREEN ROOF SYSTEM. IN SOME CASES, LOCAL CODES AND STANDARDS MAY REQUIRE GREATER DIMENSIONS FOR A PARTICULAR APPLICATION. THE DESIGNER / PLANNER MUST VERIFY COMPLIANCE WITH LOCAL CODES AND STANDARDS.



	<b>Issued on:</b> 10.09.2014	<b>System:</b> 'Landscaped Underground Garage' with Stabilodrain® SD 30	<b>Drawing title:</b> Wall connection with gravel strip	<b>Drawn by:</b> pbi
	<b>Modified:</b> 14.11.2014 09:58		<b>Job title:</b> -STANDARD ARCHITECTURAL DETAIL-	<b>Scale:</b> 1:5
	<b>File:</b> CAD_en_LUG_SD30_Fr_Wc04.dwg	Subject to technical alterations and printing errors; Authorized by ZinCo GmbH, 72622 Nuertingen, Germany Tel. ++49/7022/6003-100 Fax ++49/7022/6003-100, e-mail: info@zinco-greenroof.com, www.zinco-greenroof.com		