


# "Stormwater Management Roof" Extensive with Retention Spacer RS 60

**Detail:**  
Fallnet® SR

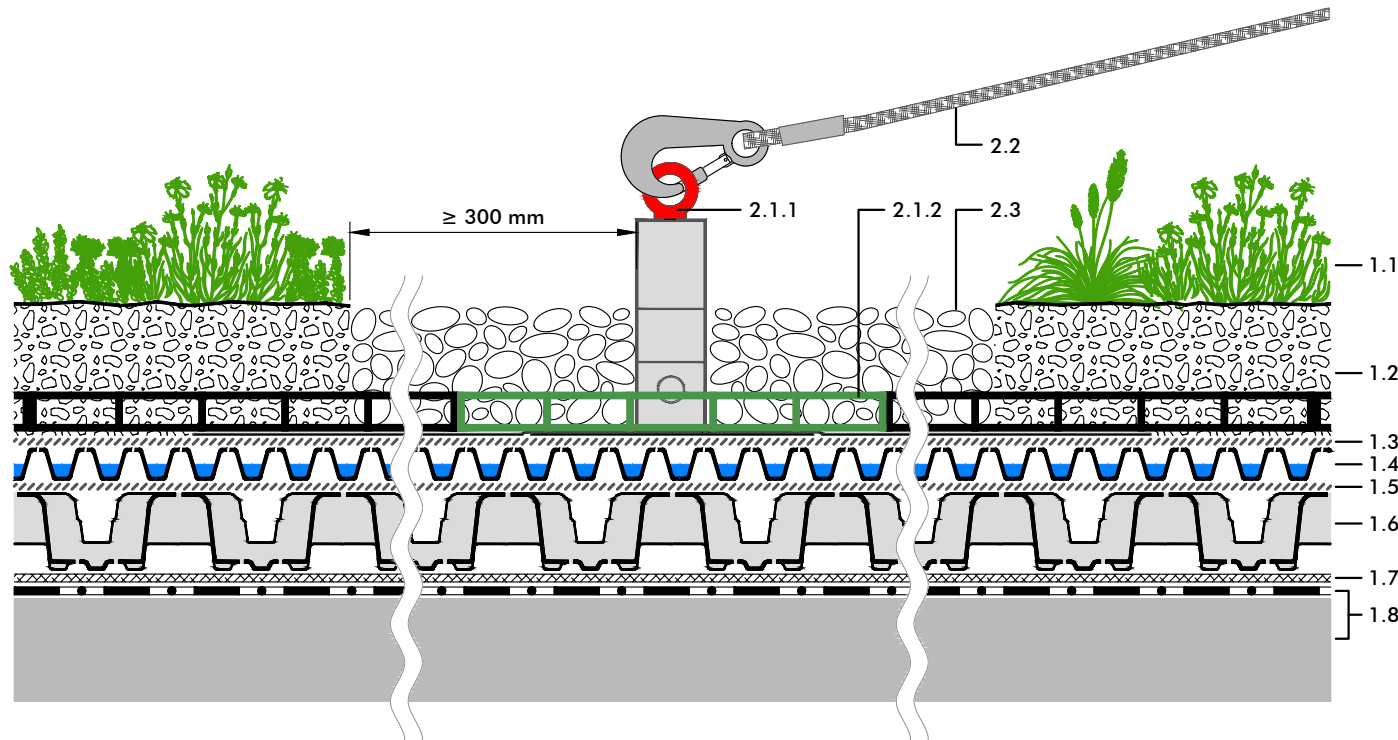

## System build-up

- 1.1 Plant community
- 1.2 System Substrate \*)
- 1.3 Filter Sheet SF
- 1.4 Floradrain® FD 25-E
- 1.5 Filter Sheet PV
- 1.6 Retention Spacer RS 60
- 1.7 Filter Sheet PV
- 1.8 Roof construction with root resistant waterproofing

## Please note:

The build-up described above is suitable for the moderate continental climate of Central Europe. For information on possible adaptations for other climates please contact the ZinCo Technical Department.

## Note:

The detailed solution shown here refers mainly to the ZinCo System Build-up. The roof construction itself as well as any other constructions are shown schematically and must be planned according to the relevant standards and guidelines.

## Project:

-

Version:	Reviewed:	Scale:	Size:
20.12.2018 PBi/ EVo	-	none	A 4

Falln01\_Ret\_Ext\_FD25\_Fd0.dwg

## 2.1 ZinCo Fallnet® SR:

2.1.1 Fixing point with eye and base plate

2.1.2 Grid Element

2.2 Connector of the personal protective equipment, e.g. ZinCo Fallnet® PSA-Set

2.3 Gravel \*)

\*) Bulk material as superimposed load on and minimum 0.5 m around the grid element Fallnet® SR:

Roof pitch 0° to 2°: minimum 110 kg/m<sup>2</sup> (dry weight)

Roof pitch >2° to 5°: minimum 130 kg/m<sup>2</sup> (dry weight)

Please regard the installation instructions for Fallnet® SR!

Authorized by ZinCo GmbH, Lise-Meitner-Str. 2,  
72622 Nuertingen/ Germany; Tel: ++49/7022-6003-0  
info@zinco-greenroof.com; www.zinco-greenroof.com

Subject to technical alterations and printing errors.

