

# "Driveway" with Floradrain® FD 60 neo

**Detail:**

**System Build-up Driveway**

**System build-up**

- 1.1 Paving, e.g. concrete pavers
  - Depth: ≥ 100 mm for cars up to 3 t
  - ≥ 120 mm for lorries up to 16 t
  - ≥ 140 mm for lorries exceeding 16 t
- 1.2 Bedding layer, stone chippings, poor in lime, 30-50 mm
- 1.3 Gravel base layer, poor in lime
  - Depth: ≥ 200 mm for cars up to 3 t
  - ≥ 250 mm for lorries up to 16 t
  - ≥ 300 mm for lorries exceeding 16 t
- 1.4 Filter Sheet PV
- 1.5 Floradrain® FD 60 neo filled with ca. 27 l/m<sup>2</sup> stone chippings, poor in lime, (diffusion openings facing downwards)
- 1.6 Protection Mat ISM 50
- 1.7 Roof construction with suitable water proofing

**Note:**

The detailed solution shown here refers mainly to the ZinCo System Build-up. The roof construction itself as well as any other constructions are shown schematically and must be planned according to the relevant standards and guidelines.

**Project:**

-

**Version:**

14.12.2018 JGI/ EVo

**Reviewed:**

-


**Scale:**

none

**Size:**

A 4

Sys\_G+F\_FD60neo\_Fd0.dwg

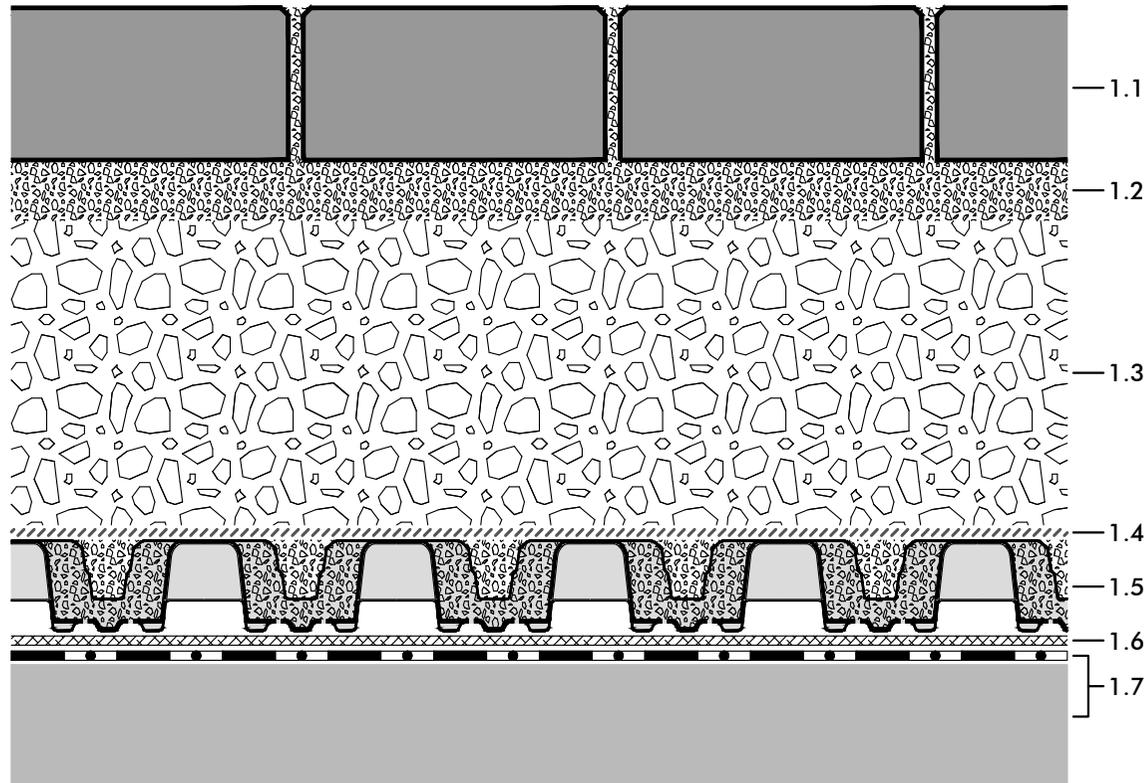

Authorized by ZinCo GmbH, Lise-Meitner-Str. 2,  
72622 Nuertingen/ Germany; Tel: + +49/7022-6003-0  
info@zinco-greenroof.com; www.zinco-greenroof.com



Subject to technical alterations and printing errors.