
Subject to technical alterations and printing errors • First edition 12/2012; Revised 07/2014

System Data Sheet "Driveway for Cars" with Elastodrain® EL 202

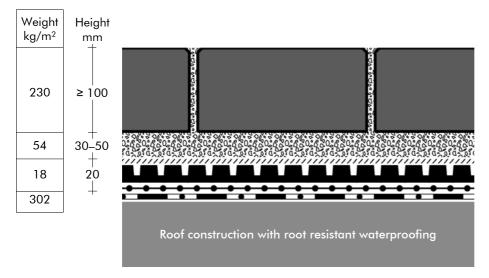

Paving slab, depth min. 100 mm

Bedding layer, 30–50 mm
Filter Sheet TG
Elastodrain® EL 202
Slip Sheet TGF 20, 2 layers for a sliding coat

Roof construction with adequate waterproofing and sufficient load bearing capacity

Build-up height: from ca. 150 mm
Build-up weight: from ca. 302 kg/m²

Description

- The heavy-duty build-up "Cars" on Elastodrain® EL 202 impresses by its extremely high mechanical loading capacity despite its limited build-up height.
- Elastodrain® 202 is also suitable for the realization of walkways, terrace areas and playgrounds.
- For the application of larger amounts of substrate Elastodrain® EL 202 can be driven on directly with wheel loaders or similar vehicles.
- "Spade resistant" protection layer made of solid recycled rubber meeting the requirements of German Standard DIN 18195.
- The drainage capacity meets the requirements of German Standard DIN 4095.

